


# 2-to-1 E-TETRA Combiner

## 360 – 440 MHz

### Type 2043

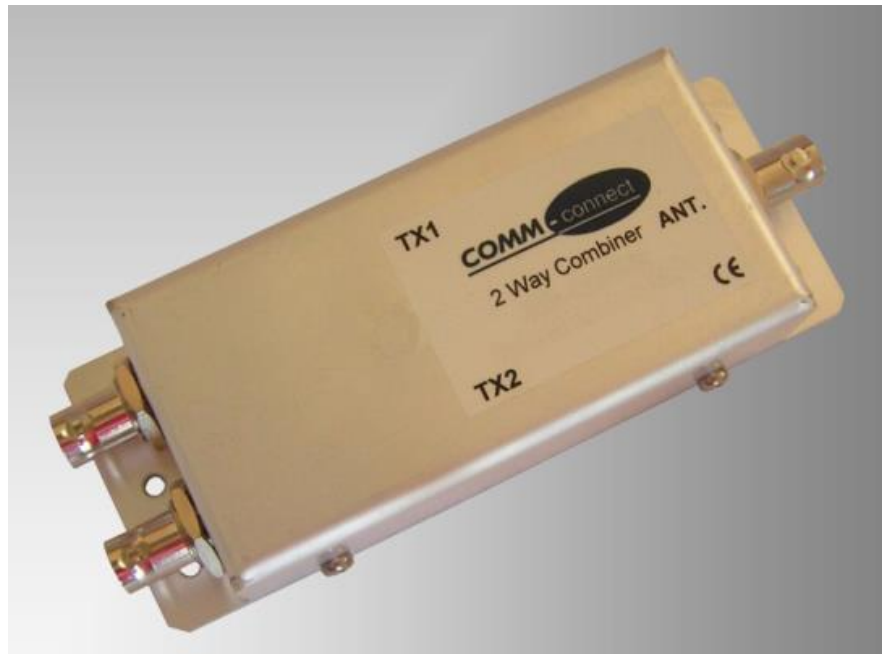

**modern engineering & design**

Edition 03/2017

rfe-global GmbH

Marie-Curie-Str. 1

26129 Oldenburg (Oldb)

Tel: +49 441 36116 655



Fax: +49 441 36116 659

E-Mail: [info@rfe-global.com](mailto:info@rfe-global.com)

**rfe-global**  
radio frequency equipment

## Typical Application Areas:

The 2-to-1 E-TETRA Combiner allows 2 stations to utilize 1 antenna. It is equipped with BNC female connectors and mounting flaps.

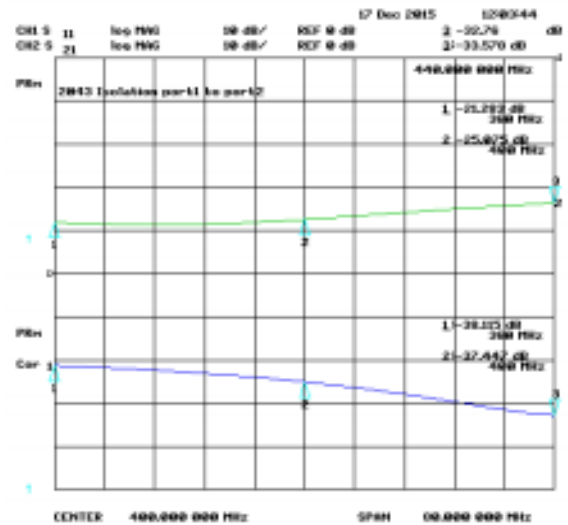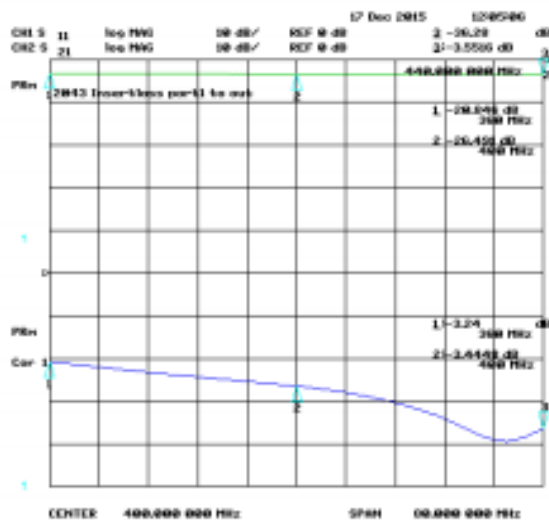

## Preliminary Technical Specifications:

Operating temperature:	-20 °C to +60 °C
Power rating (each input):	10 W
Frequency range:	360 MHz – 440 MHz
Isolation (input to input):	> 30 dB (380 – 390 MHz)
Insertion loss total:	< -3.5 dB
SWR (input/output):	< 1.2:1, -20 dB
Impedance:	50 Ω
Weight:	approx. 280 g
Number of inputs:	2
Connector:	BNC female
Dimensions (incl. connectors):	144 x 60 x 30 mm

The manufacturer reserves the right to implement technical changes.

Manufacturer:



COMM-Connect A/S  
Raasigvangen 2  
3550 Slangerup  
Denmark

Distribution by:

**rfe-global**  
radio frequency equipment

rfe-global GmbH  
Marie-Curie-Str. 1  
26129 Oldenburg (Oldb)  
Germany