


COMM - connect



Installation Manual

GPS Repeater Type 6030 & 6031


Edition Notice !

This publication applies to COMM-connect A/S type 6030 GPS Repeater product hardware release “1”

Copyright © 2014
All rights reserved to:
COMM-connect A/S
Sigerslevostervej 11
DK-3600 Frederikssund
Denmark

Physical installation:

Please install the COMM-connect GPS Repeater as close to the centre of the room as possible. This will give the best coverage for the largest number of units. Please note that room dividers/ cubicle walls made from metals will limit the range performance.

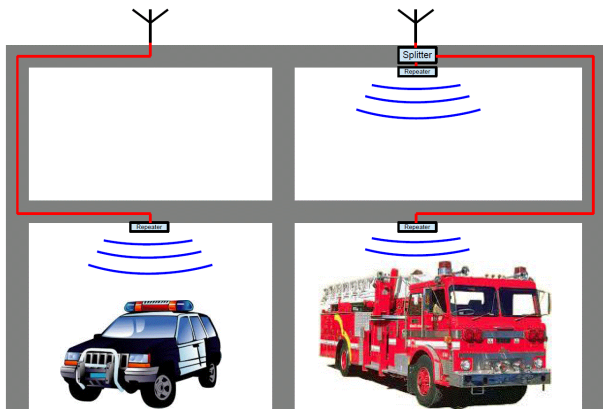

Indicators & adjustment:



Power indicator

External antenna input

Saturation detect

Gain adjustment

Installation procedure:

1. Mount the repeater on the ceiling using the four mounting holes in the flaps protruding the casing.
2. Connect the external antenna to the 'External antenna input'
3. Connect 90 - 230V mains power to the IEC connector
4. Using a small flat-bladed screwdriver, adjust the gain until the 'Saturation / oscillation detect' LED lights up.
5. Turn the 'Gain adjustment' screw in the opposite direction until the 'Saturation / oscillation detect' LED switches off.

Another great product from COMM-connect:

PMR Power Meter

Type 3030



Please visit our webpage for more great products:

www.comm-connect.com

