




**Sunny, Diplexer, 410-430/456-458MHz, 200W, N(F)**

**Model : SUN-DIP-410'430/456'458-200-N(F)**

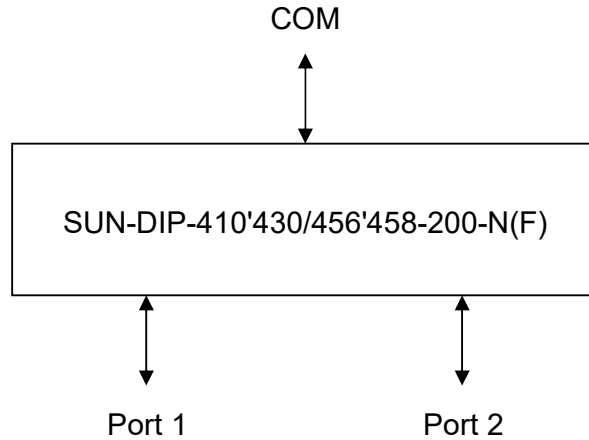

<b>Model</b>	<b>SUN-DIP-410'430/456'458-200-N(F)</b>	
<b>Frequency Range (MHz)</b>	Port 1 410-430MHz	Port 2 456-458MHz
<b>Insertion Loss</b>	≤1dB	
<b>VSWR (All Ports)</b>	≤1.25	
<b>Band Rejection</b>	≥70dB	
<b>Power</b>	100W	100W
<b>Mechanical Specifications</b>		
<b>Environment</b>	Indoor	
<b>Dimensions LxWxH (mm)</b>	132*191*51 (not included with connector and mounting)	
<b>Impedance</b>	50Ω	
<b>Operating Temperature</b>	-25 to 85°C	
<b>RF Connector</b>	N(F)	

Distribution by:

**rfe-global**

radio frequency equipment

rfe-global GmbH  
Marie-Curie-Str. 1  
26129 Oldenburg (Oldb)  
Germany

Phone: +49 441 94911 655  
Fax: +49 441 94911 659  
E-Mail: inquiry@rfe-global.com  
Web: www.rfe-global.com

Technical data are subjected to change without notice – File: SUN-DIP-SUN-DIP-410'430/456'458-200-N(F)-200-N(F) 2021V1.0